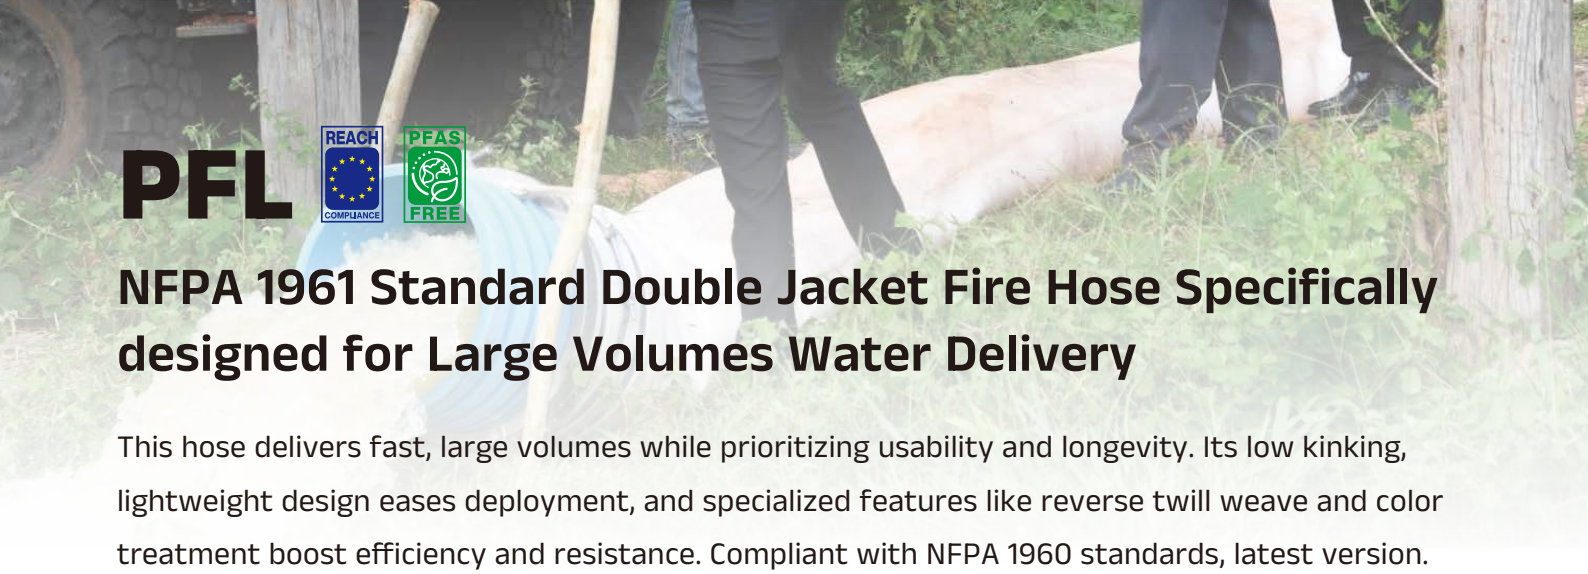

PFL

NFPA 1961 Standard Double Jacket Fire Hose Specifically designed for Large Volumes Water Delivery

This hose delivers fast, large volumes while prioritizing usability and longevity. Its low kinking, lightweight design eases deployment, and specialized features like reverse twill weave and color treatment boost efficiency and resistance. Compliant with NFPA 1960 standards, latest version. it's built for reliability.

- **OUTER JACKET**
  Polyester and/or Nylon
- **INNER JACKET**
  Polyester and/or Nylon
- **LINER**
  EPDM or TPU
- **TEMPERATURE RANGE**
  -4°F to 158°F(-20°C to 70°C)
- **STANDARD LENGTH**
  up to 300'
- **STANDARD COLOR**
  uncoated /coated

FEATURES

- High-efficiency large-volume water delivery
- Superior adhesion strength, maintains structural integrity
- Low kinking for uninterrupted flow
- Color-treated jacket: abrasion & mildew resistant
- Reverse twill weave reduces friction loss
- Meets latest NFPA 1961 standard
- Lightweight, easy deployment & retrieval

TECHNICAL DATA

Nominal Size		Working Pressure		Test Pressure		Burst Pressure		Standard
inch	mm	psi	bar	psi	bar	psi	bar	
4″	102	300	21	600	42	900	63	NFPA
5″	127	300	21	600	42	900	63	
6″	152	300	21	600	42	900	63	
7-1/4″	184	300	21	600	42	900	63	

5ELEM

Web: en.5elem.com

Email: marketing@5elem.com